

SPECIFICATIONS

PRINCE™ TWO HANDLE MINI-WIDESPREAD LAVATORY FAUCET


Model

D304110

Description

- Ceramic disc valves
- 3 5/8" high spout, 3 3/4" spout length, laminar flow
- 50/50 touch down drain assembly
- 3 hole mount, 4" - 12" installation
- 1.2gpm (4.5L/min) maximum flow rate @60 psi
- Meets CEC Requirement

Flow Rate

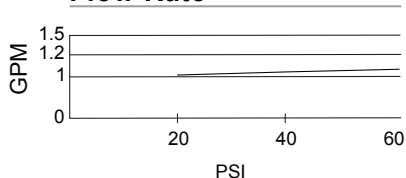

Standards



NSF/ANSI 372

• NSF/ANSI 372



• ASME A112.18.1M/A112.18.1



• ADA Accessibility Guidelines for
Buildings and Facilities -
309.4 Operation for Operable Parts

•WaterSense Pending


Warranty

Danze products are covered by a manufacturer's
limited "lifetime" warranty for manufacturing defects.



Finishes Available

- Chrome
- Other: Refer to Price List
for additional finish

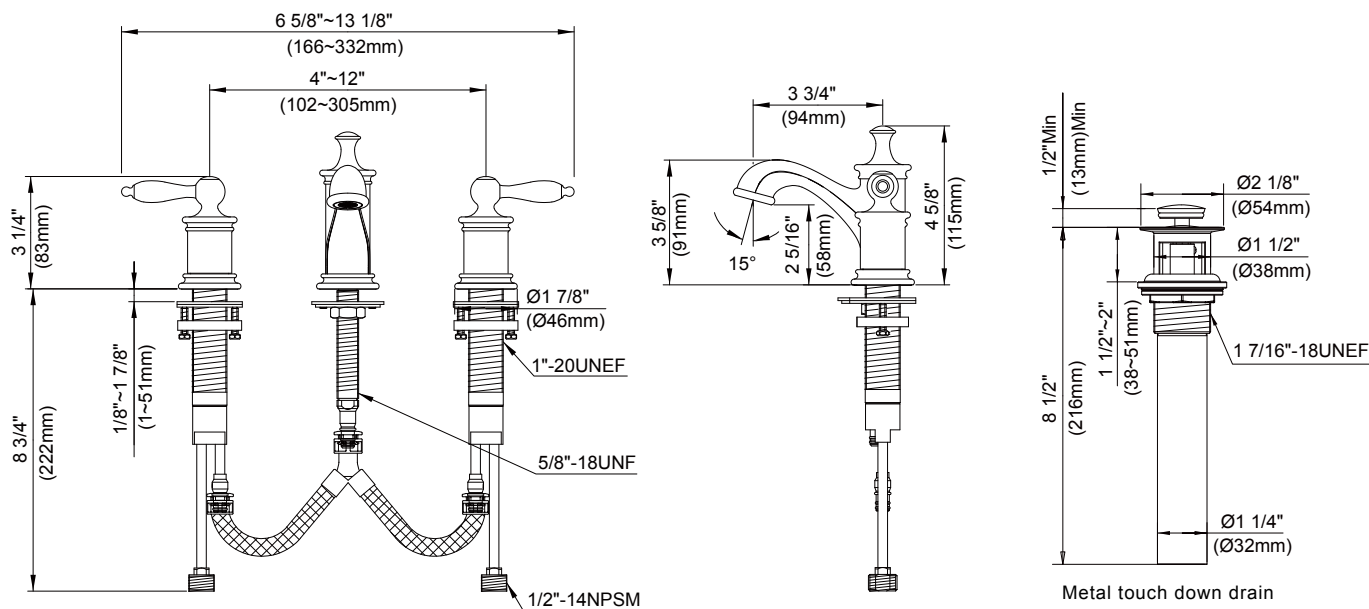

Metal touch down drain

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____