



DesignLights Consortium™
Qualified Luminaires:
HFLQF1X68U5KC***

FEATURES

Die Cast Aluminum Housing & Hinged Front Frame, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Clear Flat Glass Lens or Clear Flat Prismatic Glass Lens

Includes Stamped Steel Small Yoke. Optional Large Mounting Yoke, Adjustable Die Cast Slipfitter with Angle Indicator, Swivel Wall Bracket, or Pole Tenon Mount Available

Custom Colors Available Upon Request.

LumaFit LED:

Array Lumens: 7280; Delivered Lumens: 5984 (F, Clear)

CRI: 80; CCT: 4000K, 5000K

Rated Life: 50,000 Hours; 5-Year Warranty

Aluminum Boards

Wattage: Array: 68.2w, System: 75w

Driver: Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz; Dimmable Driver

Listing & Ratings: CSA: Listed for Wet Locations. IP65
Operating Temperatures: -40°C to +40°C

Options: Surge Protection

Accessories Sold Separately.

LM-79 Reports Available on Select Models.




DuraLED Horizontal Flood Light



HFL
(Shown with Small Yoke.)



DIMENSIONS

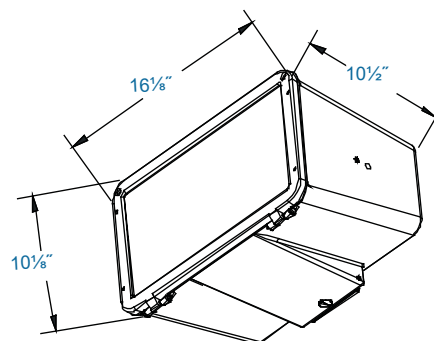

HFL

ORDER INFORMATION

DuraLED Horizontal Flood

Catalog #

Description

Complete Units

Ordering Information

Example: HFLQF1X68U5KCZSYSP

| | | |
|------------|--------------------------|--|
| HFL | Model: | HFL |
| Q | LED Mfr: | Q=QSSI |
| F | Optics: | F=Medium Flood |
| 1X | Number of Arrays: | 1X=One |
| 68 | Wattage: | 68=68w |
| U | Ballast: | U=120-277V, H=347/480V |
| 5K | CCT: | 4K=4000K, 5K=5000K |
| C | Lens: | C=Clear Flat Glass Lens, P=Clear Flat Prismatic Glass Lens* *Use with F Optic Only. |
| Z | Color: | Z=Bronze |
| SY | Mounting: | SY=Small Yoke |
| SP | Options: | Specify Twist Lock Photocell: P40=P18140 110-120VAC Instant, P42=P18142 110-277VAC Instant, P50=P18150 120VAC Time Delay, P52=P18152 277VAC Time Delay R7=7-Pin ANSI C136.41-2013 Twist Lock Receptacle, SF=Single Fuse, DF=Double Fuse, SP=Surge Protection |

APPLICATIONS

Ideal for Facades, Flags, Signs and Displays
General Security Lighting

LED

ACCESSORIES

PHOTOCELLS:

P18130 - 480VAC Twist Lock Photocell Receptacle

P18130R7 - 7-Pin Twist Lock Photocell Receptacle ANSI C136.41-2013 with Integrated Controls for LED, 480 VAC

P18131 - Twist Lock Non Shorting (Open) Cap disconnects service to fixture for temporary or permanent disabling (fixture always off). IP65, 480V maximum.

P18132 - Twist Lock Shorting Cap provides fixed service to fixture (fixture always on). IP65, rated load 7200w Tungsten.

P18140 - 110-120VAC Instant Twist Lock

P18142 - 110-277VAC Instant Twist Lock

P18150 - 120VAC Time Delay Twist Lock


P18152 - 277VAC Time Delay Twist Lock



**Glare Shield
(HFLGS)**
(Shown Mounted)



**Wireguard
(HFLWG)**
(Shown Mounted)



**Vandal Shield
(HFLVS)**



**Slipfitter
(SF)**



**Swivel Wall Bracket
(SWB)**



**Small Yoke
(HFLSY)**
(Shown Mounted)



**Large Yoke
(HFLLY)**
(Shown Mounted)



**Pole Tenon Mount
(PTM)**
(Shown Mounted)



P18130



P18130R7



P18131



P18132



P18140



P18142




P18150



P18152

PHOTOMETRICS

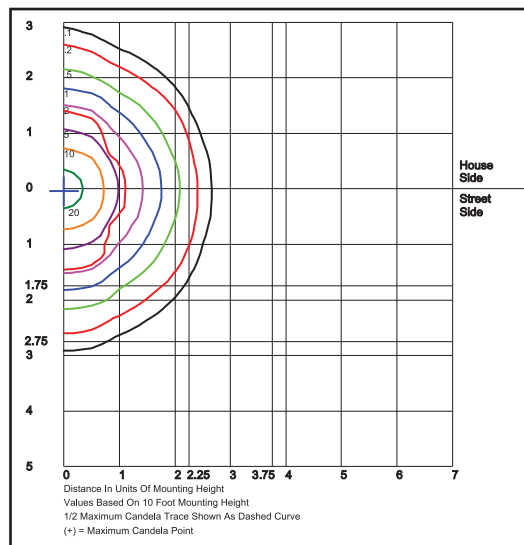


HFLQF1X68U5KC

Specifications subject to change without notice.




DuraLED Horizontal Flood Light

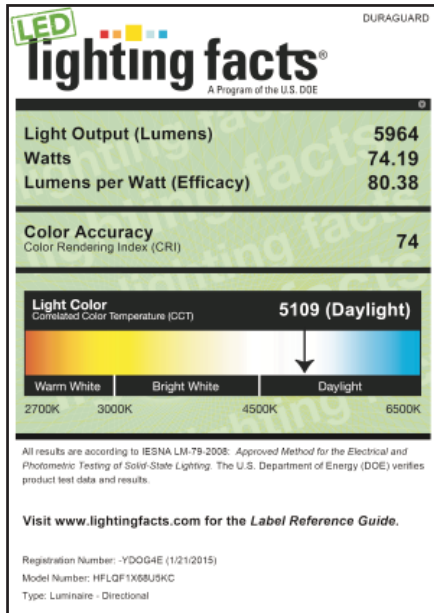

LM-79 Report Available.
DesignLights Consortium[™] Qualified Luminaire.



*DuraLED Horizontal
Flood Light*



LED

Specifications subject to change without notice.