



DesignLights Consortium™
Qualified Luminaires:
MFLQF1X37U5KC***

FEATURES

Die Cast Aluminum Housing & Hinged Top Frame, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Clear Flat Glass Lens or Clear Flat Prismatic Glass Lens

Adjustable Knuckle with Angle Indicators & ½" NPS Threads or Optional Adjustable Slipfitter with Angle Indicators

Custom Colors Available Upon Request.

LumaFit LED:

Array Lumens: 4582 (F Optic); 4101 (I Optic)
Delivered Lumens: 3390 (F, Clear); 3271 (I, Clear)
CRI: 73 (F Optic); 81 (I Optic); CCT: 5000K
Rated Life: 50,000 Hours; 5-Year Warranty; Aluminum Boards

Wattage: Array: 37.2w, System: 41w

Driver: Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz; Dimmable Driver

Listing & Ratings: CSA: Listed for Wet Locations. IP65
Operating Temperatures: -40°C to +40°C

Options: Surge Protection

Accessories Sold Separately.

LM-79 Reports Available on Select Models.




DuraLED Mid-Size Flood




MFL



DIMENSIONS

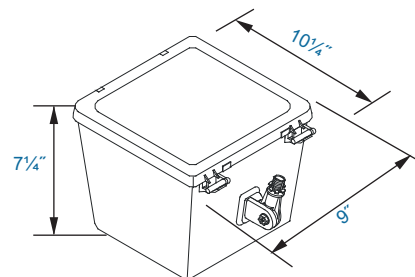

MFL

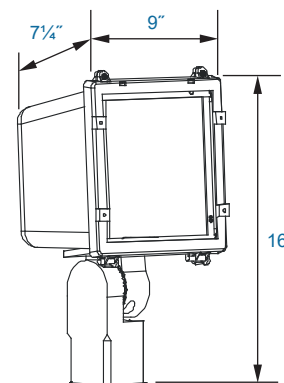

MFL

with Mounted Slipfitter

APPLICATIONS

Lighting Large Broad Areas on Facades, Displays and Signs
General Security Lighting


ORDER INFORMATION

DuraLED Medium Flood


Catalog #		Description
Complete Units		
Ordering Information		
Example: MFLQF1X37U5KCZSP		
MFL	Model:	MFL
Q	LED Mfr:	Q=QSSI
F	Optics:	F=Medium Flood, I=Spot Flood
1X	Number of Arrays:	1X=One
37	Wattage:	37=37w
U	Ballast:	U=120-277V, H=347/480V
5K	CCT:	5K=5000K
C	Lens:	C=Clear Flat Glass Lens, P=Clear Flat Prismatic Glass Lens* *Use with F Optic Only.
Z	Color:	Z=Bronze
*	Mounting:	½" NPS Knuckle Included. *Add SF for Optional Slipfitter.
SP	Options:	SF=Single Fuse, DF=Double Fuse, SP=Surge Protection

ACCESSORIES**OPTIONS:**Glare Shield: **MFLGS**Wireguard: **MFLWG**Vandal Shield: **MFLVS**Adjustable Slipfitter: **SF**Post Top Fitter: **PTF**Ground Stake: **STK**Tempered Clear Glass Lens: **MFLGL**

**Glare Shield
(MFLGS)**
(Shown Mounted)



**Wireguard
(MFLWG)**



**Vandal Shield
(MFLVS)**
(Shown Mounted)




Slipfitter (SF)




Post Top Fitter (PTF)




Ground Stake (STK)



Clear Glass Lens (MFLGL)

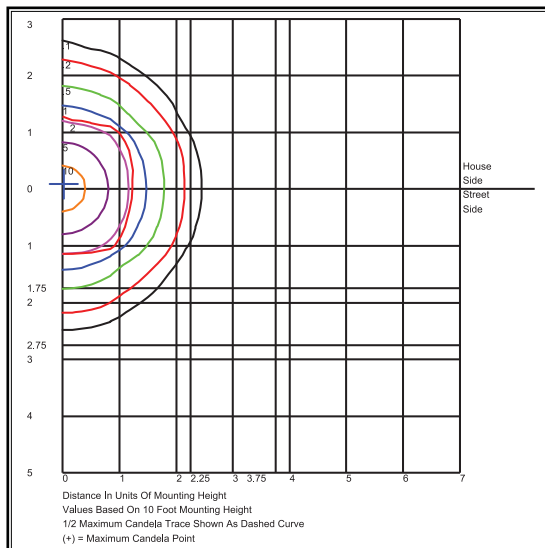PHOTOMETRICS

MFLQF1X37U5KC

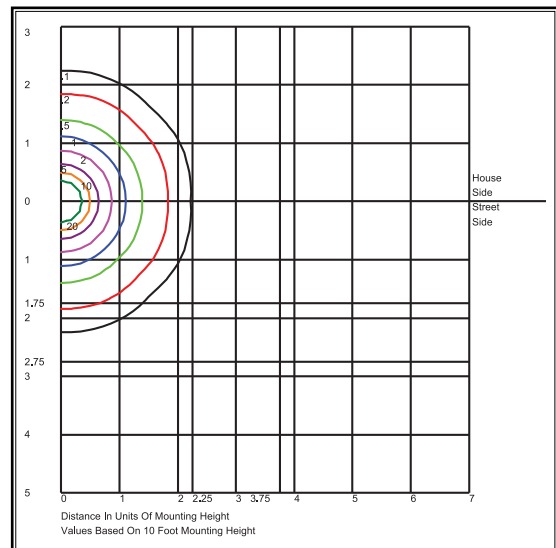


MFLQI1X37U5KC

Specifications subject to change without notice.




DuraLED Mid-Size Flood

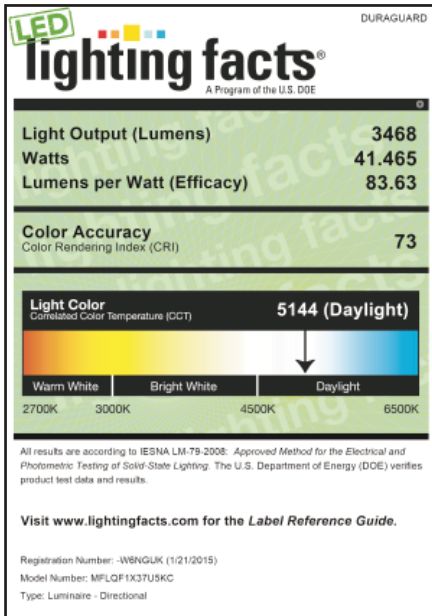

LM-79 Report Available.
DesignLights Consortium™ Qualified Luminaire.



DuraLED Mid-Size Flood



Specifications subject to change without notice.