

Features -

- Specifically designed for commercial and industrial applications
- 1.28* or 1.6 gpf low water consumption (*when using the proper 1.28 flushometer)
- High performance, high efficiency (HET)
- 1-1/2" top spud provided to accommodate many brands of flush valves
- 10" rough-in
- 2" glazed trapway
- Available in White and Standard Colors: Biscuit, Classic Bone
- The Mansfield® limited lifetime warranty



Components _____

Model # Description Codes/Standa

1311NS Elongated front flush valve toilet bowl. Less toilet seat, flush valve and supply. Specify color.








Specifications

Model	#	Description	Codes/Standards	
1311N	1S	Elongated front, flush valve toilet	HIGH EFFICIENCY TOLLET	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	2"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-1/2"
Flush System	Siphon Jet Technology	Rough-in	10"
Water Usage	1.28 or 1.6 gpf / 4.86 or 6.0 lpf	Shipping Weight	Model 1311NS - 53 lbs. (24 kg)
Water Surface Area	9-3/4" x 11-1/2"		
MaP Rating	1000 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Five Year Limited

Technical Information

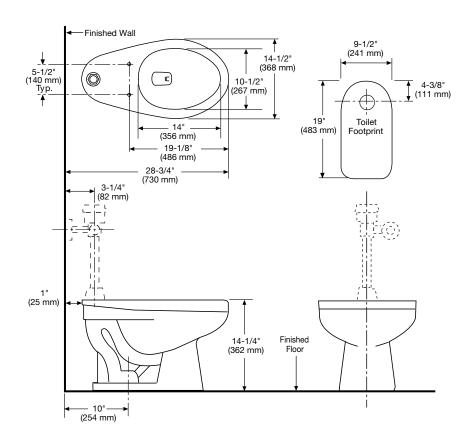

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.