# 388-376 **SUMMIT® PRO**

## MANSFIELD®


Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

#### **FEATURES**

- · High performance MagnaFlush™ flushing technology
- · 1.6 gpf / 6.0 lpf
- · Round front, SmartHeight™ bowl
- SmartFasten™ 3-bolt tank-to-bowl connection
- · PuraClean® easy-to-clean glaze
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® pilot operated anti-siphon fill valve
- · 12' rough-in
- · Model 59 color match, metal trip lever

DESCRIPTION

- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim
- · Available in White

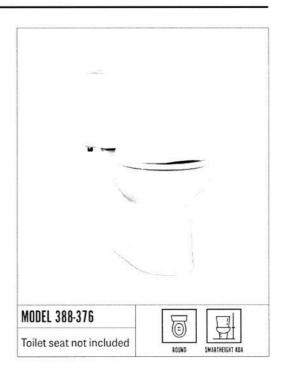

CODES/STANDARDS

### COMPONENTS

MODEL #

388-376	Round front, SmartHeight™, two-piece toilet. Less toilet seat and supply.		
388	Round front, SmartHeight™ toilet bowl only. Less supply.		
376	Tank and cover only, with left hand, front-mount, color match, metal trip lever. Less supply.	ADA COMPLIANT	
TANK TRIM & R	EPLACEMENT PARTS		
59	Trip lever - color match, metal trip lever, left hand		
2037-1212	Summit® 1.6 rigid flapper flush valve		
400A	Fluidmaster® pilot anti-siphon fill valve		
2206	Pilot operated fill valve		
630-0030	Replacement flush valve seal		
386-LID	Tank lid		



# 388-376 **SUMMIT® PRO**

# **MANSFIELD**®

Round Front, SmartHeight™, Vitreous China, Two-Piece Toilet

### **SPECIFICATIONS**

MODEL #	DESCRIPTION	CODES/STANDARDS
388-376	Round front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet	ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	MagnaFlush™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8. X 9.
ROUGHIN	12'
MAP RATING	1,000 grams


TRAP DIAMETER	2*
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 388 - 52 lbs. (23.5 kg) Model 376 - 36 lbs. (16.3 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited Five Year

### TANK OPTIONS

376RH Variation of model 376, with right hand trip lever.

## TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

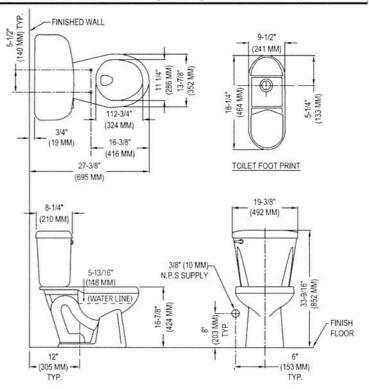

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

