## 4987-3987 **VANQUISH**®

### **MANSFIELD®**

Elongated Front, SmartHeight<sup>™</sup>, Vitreous China, Two-Piece Toilet

#### **FEATURES**

- 1.6 gpf / 6.0 lpf low water consumption
- · Revolutionary seat design with side-mount hinges for easy cleaning
- · PuraClean® easy-to-clean glazed surface
- Elongated front, SmartHeight<sup>™</sup> bowl
- 3' Rigid Flapper flush valve requires less force to flush, is more consistent and uses a simple universal repair part/seal
- · Fluidmaster® Pilot anti-siphon fill valve
- 12' rough-in
- SmartFasten<sup>™</sup> 2-bolt tank-to-bowl connection
- · Model 39 decorative metal trip lever
- · 2' glazed trapway
- The Mansfield® limited lifetime warranty on china, Five-year limited warranty on tank trim & seat
- Available in white



#### COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
4987	Elongated front, SmartHeight™ bowl with side-mount seat.			
3987	Tank and lid only. With left hand, chrome-plated metal trip lever. Less supply.			
SB4000	Patented slow close seat with side-mount hinges*	ADA COMPLIANT		
TANK TRIM & REPLACEMENT PARTS				
39	Trip Lever - chrome-plated metal trip lever, left hand			
400A	Fluidmaster® Pilot anti-siphon fill valve			
2206	Pilot operated fill valve			
3987-1112	3' Rigid Flapper flush valve			
630-0030	Replacement flush valve seal			
3987-LID	Tank lid			



# 4987-3987 **VANQUISH®**

### **MANSFIELD®**

Elongated Front, SmartHeight<sup>™</sup>, Vitreous China, Two-Piece Toilet

#### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
4987-3987	Elongated front, SmartHeight™ (1.6 gpf/6.0 lpf) two-piece toilet	C ® ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	SmartFlush™ Flushing Technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8' X 7'
ROUGH-IN	12'
MAP RATING	1,000 grams

TRAP DIAMETER	2'
TRAP SEAL	2-3/8'
SHIPPING WEIGHT	Model 4987 (w/seat) - 63 lbs. (29 kg) Model 3987 - 35 lbs. (16 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim & Seat - Limited Five-Year

### TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

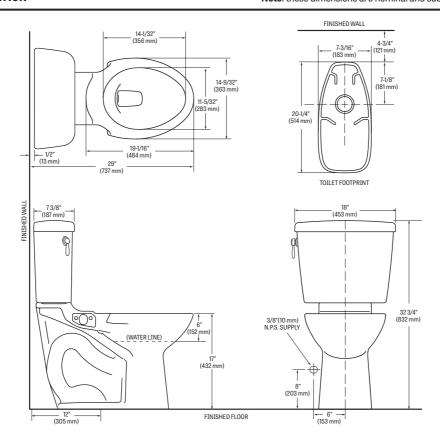

Fixture performance and specifications meet or exceed ASME A112.19.2-2013/CSA B45.1-13 standards, and other state and local codes.

