MANSFIELD®

1047-1083

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

FEATURES

- · 2-bolt tank-to-bowl connection
- 1.28 gpf / 4.8 lpf high efficiency water consumption (HET)
- Elongated front SmartHeight[™] bowl
- 3' flush valve
- · Anti-siphon pilot fill valve
- 12' rough-in
- · Model 83 chrome-plated, plastic trip lever with brass arm
- · 2'trapway
- · One-year warranty on vitreous china and tank trim
- · Available in White



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS		
1047-1083	Elongated front, SmartHeight™ two-piece toilet.			
1047	Elongated front, SmartHeight™ toilet bowl only. Less toilet seat.			
1083	Tank and cover only with left hand, front-mount, chrome-plated, plastic trip lever and anti-siphon pilot fill valve. Less supply.	HIGH EFRICINCY C ® ADA COMPLIANT		
TANK TRIM & REPLACEMENT PARTS				
83	Trip lever - chrome-plated, plastic trip lever, left hand			
283	3' Flush valve			
90	Anti-siphon pilot fill valve			

MANSFIELD®

1047-1083

Elongated Front, SmartHeight™ Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
1047-1083	Elongated front, SmartHeight™ (1.28 gpf / 4.8 lpf) two-piece toilet	HIGH EFFICIENCY TOLLET ADA COMPLIANT

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	3' Flush Valve
WATER USAGE	1.28 gpf / 4.8 lpf
WATER SURFACE AREA	6' X 7'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-1/4'
SHIPPING WEIGHT	Model 1047 - 47.4 lbs. (21.5 kg) Model 1083 - 28.6 lbs. (13 kg)
WARRANTY	Vitreous China - Limited One Year Tank Trim - Limited One Year

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

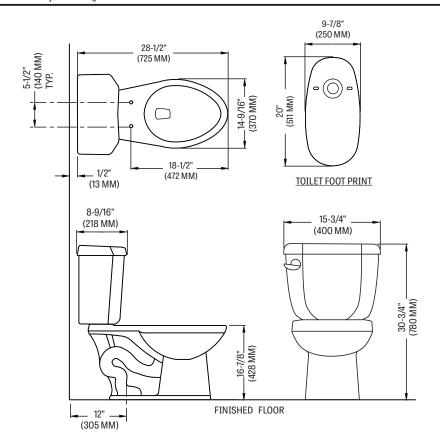

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.