



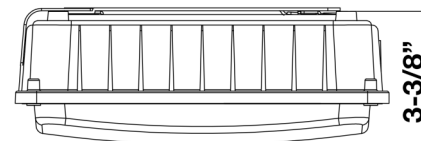



ULTRATHIN CANOPY SURFACE MOUNT 70W

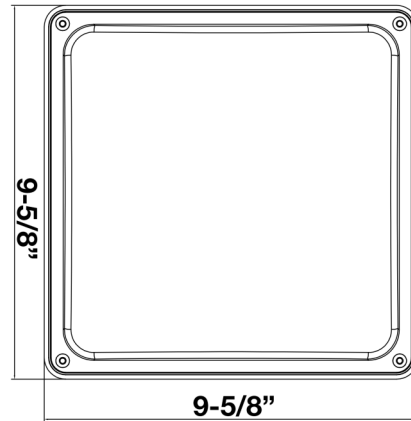

- Features:
- Thin Appearance
 - Good Heat Dissipation
 - Convenient Installation
 - Pendant or Surface Mount
 - Long Life high Efficiency LEDs

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Lumens/Watt	DLC#
71607B	White	70W	7708	4000K	120-277	0-10V	113	PLRV4BHBTJ3D

PHOTOMETRY

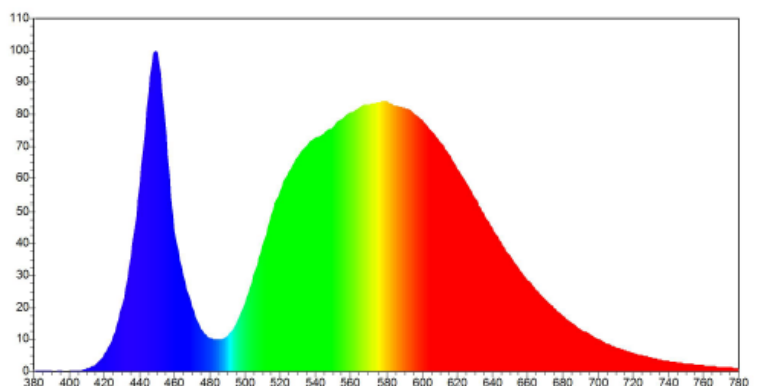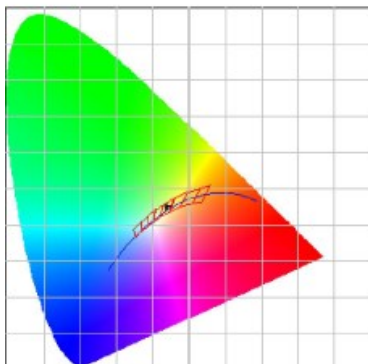



ULTRATHIN CANOPY SURFACE MOUNT 70W

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .568A@120V; .284A@277V

Frequency: 60Hz

Power Factor: $\geq .9$

Product Parameters:

70 Watts

Efficacy: 113 lumens per watt

50,000+ LED Life Span

CCT: 4000K (Neutral White)

Chromacity Measurements:

Beam Angle: 140°

CRI: ≥ 70

R9: -26.4

DUV: 0.0045

Chromaticity (x,y): x=.3766; y= .3841

Chromaticity (u,v): u=.2197; v= .3361

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts: 120-277

Driver Output Amps: 205mA

Surge Protection: 10,000V

Dimming: 0-10

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

Powder Coat White Finish

IP Rating: IP65 Wet Location Rated

Lens Material: Prismatic Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL

DLC#: PLRV4BHBTJ3D

Carton Qty: 1

Weight: 8 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).