
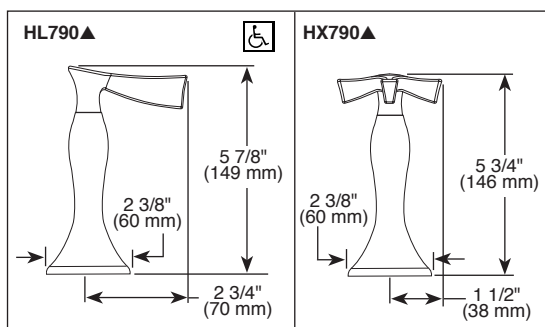


Submitted Model No.: _____

Specific Features: _____

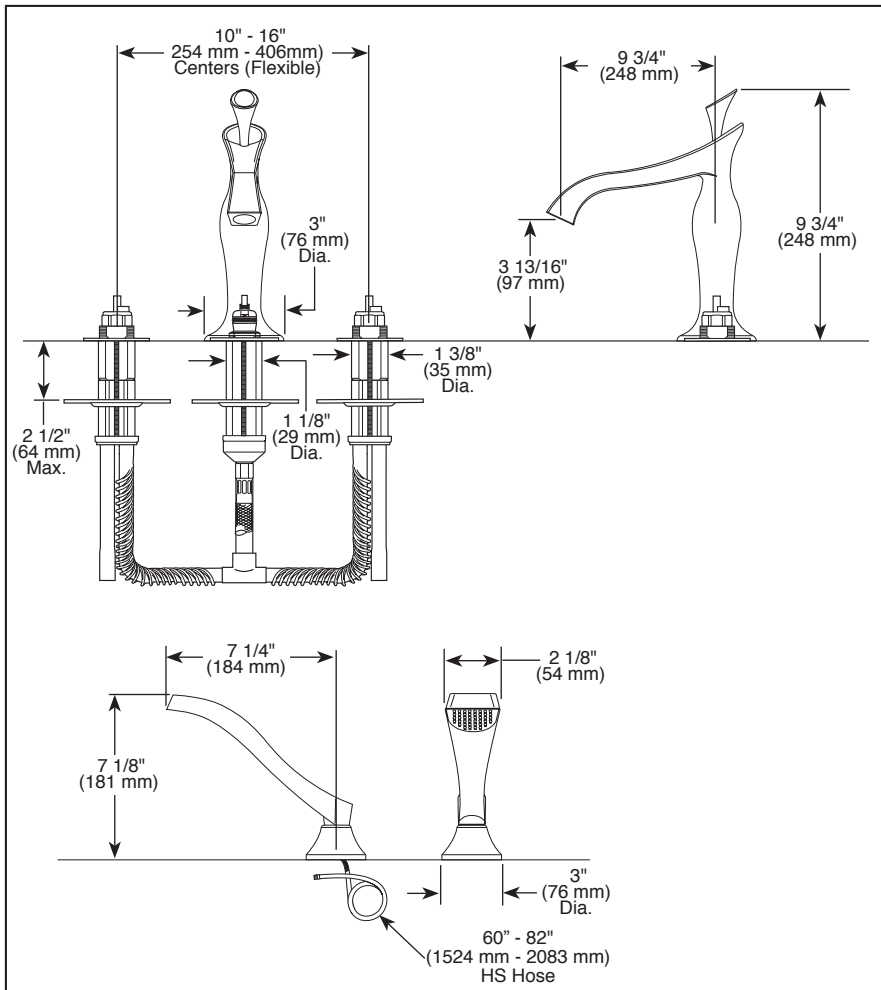

▲ Designate Proper Finish Suffix

BRIZO®

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- RSVP® Two Handle Roman Tub Valve Trim
- Three Hole Applications (T67390-LHP)
- Four Hole Applications (T67490-LHP)
- Temperature and Volume Controlled With Handles
- Flexible Ledge Mount
- Rough-In Kit Must Also be Ordered to Complete Installation (R62707 For Three Hole and R64707 For Four Hole)

STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation (R62707 for three hole and R64707 for four hole). There are separate specification sheets on each rough-in kit if more details are required.
- Handshower includes double check valves for backflow prevention (T67490-LHP)
- Handshower flows 2.00 gpm @ 80 psi, 7.6 L/min @ 550 kPa
- Minimum 5" (127 mm) to maximum 8" (203 mm) distance between hole
- LHP - Less Handle Program. See handle options below

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1- Valve control only
- EPA WaterSense - Applies to handshower only - RP48429*

