








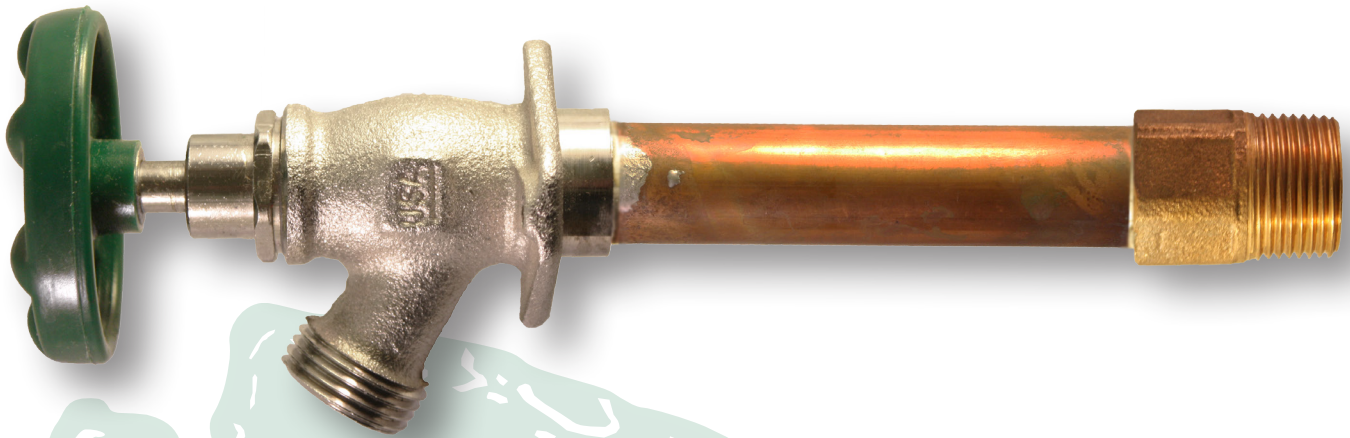


## Standard Frost-Free Hydrant 450- Series



### Features

- Standard Frost-Free Hydrant
- Heavy Duty Red Brass Alloy
- Available in 4"-14" models, other lengths available by special order
- Max 140°F – 125 PSI
- Flow Rate: 7-8 GPM at 50 PSI
- Exclusive "No-Leak" O-Ring Bonnet (no packing nut to tighten)
- Green Oval Handle Made from Diecast Aluminum
- Available in Loose Key & *QuickTurn™* Models: Easy On/Off Operation without Letting Go of the Handle
- 3 Year Limited Warranty
- Manufactured in Los Angeles, California

### 450 Series Hydrant Models



Model	Inlet Connection	
451	3/4" Wirsbo® WPX	
452	1/2" Wirsbo® WPX	
453	3/4" Push-Fit	
454	1/2" Push-Fit	
455	1/2" FIP or 3/4" MIP	
456	1/2" Sweat or 3/4" MIP	
458	3/4" Sweat or 3/4" MIP	
457	3/4" PEX Connection	
459	1/2" PEX Connection	



**Arrowhead Brass & Plumbing, LLC**  
**Reliable - Proven - Trusted - Since 1936**

5147 Alhambra Ave. ▼ Los Angeles ▼ CA ▼ 90032  
P. 323.221.9137 ▼ F. 323.221.2579 ▼ [www.arrowheadbrass.com](http://www.arrowheadbrass.com)



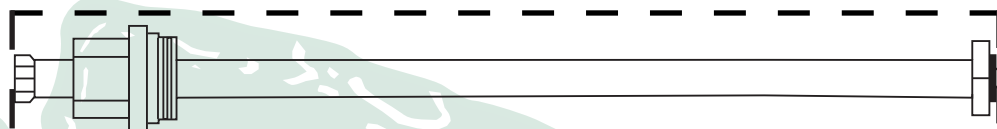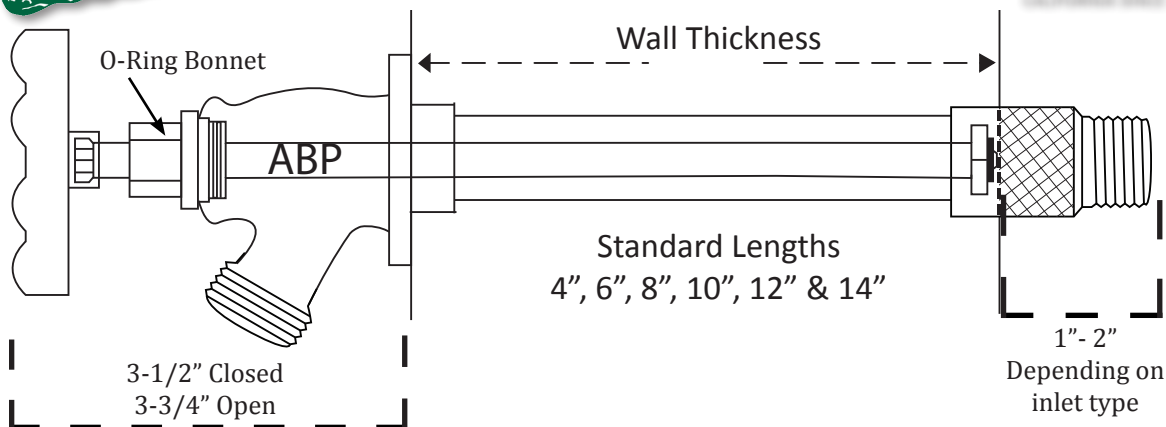

## Dimensions

Hydrant Length	Length (Full)	Width	Depth	Weight (LBS)
02	7"	2.75"	2"	0.8
04	9"	2.75"	2"	0.9
06	11"	2.75"	2"	1
08	13"	2.75"	2"	1.05
10	15"	2.75"	2"	1.12
12	17"	2.75"	2"	1.24
14	19"	2.75"	2"	1.35

## REPAIR KITS & PARTS

Part Kit (PK) #	Description	Parts (Sold Separately)
PK1290	Green Oval Handle (Aluminum Diecast) Stainless-Steel Self-Tapping Screw	11 8
PK8004 Through PK8014	Frost-Free Stem Assembly; Last two digits specify valve length 02"-14" (Stem overall length minus 4")	
	Replacement Seat Washer	5
	Stainless-Steel Seat Washer Screw	6
	White Nylon Bonnet Washer	62
PK1450	Gap Spacer (Grey)	79



**ILLEGAL TO USE FOR POTABLE (DRINKING) WATER**  
 Prop 65 Warning: This product contains lead compounds or other chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.



**WARNING!** LEAVING HOSE CONNECTED WILL PREVENT FAUCET FROM DRAINING: WATER WILL FREEZE & CAUSE DAMAGE. IT IS ADVISED TO REMOVE HOSE WHEN NOT IN USE & NOT TO USE FAUCET FOR CONSTANT PRESSURE APPLICATIONS.



**Arrowhead Brass & Plumbing, LLC**  
**Reliable - Proven - Trusted - Since 1936**

5147 Alhambra Ave. ▼ Los Angeles ▼ CA ▼ 90032  
 P. 323.221.9137 ▼ F. 323.221.2579 ▼ [www.arrowheadbrass.com](http://www.arrowheadbrass.com)

