

► Code Number

3082653

► Description

Exposed Urinal Flushometer, for ¾" top spud urinals.

► Flush Cycle

1.5 gpf / 5.7 lpf

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling Wall and Spud Flange for ¾" Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover and Tailpiece shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

► Accessories (Sold Separately)



See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

► Fixtures

Consult factory for matching Sloan brand fixture options.

► Product Number

186-1.5

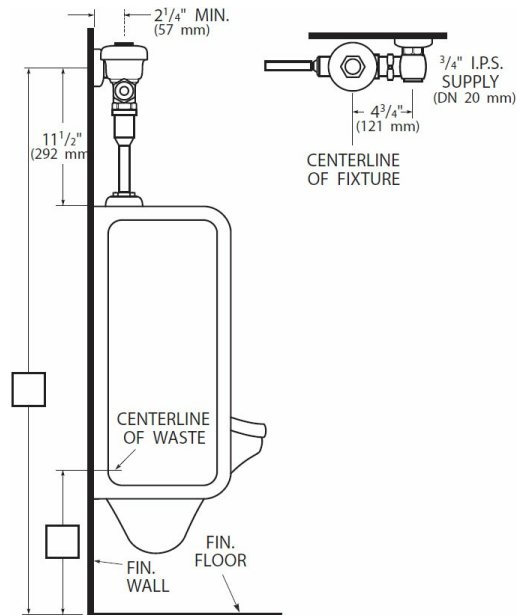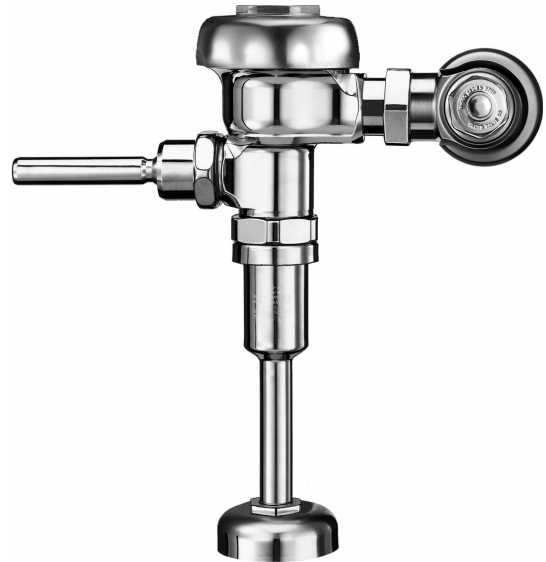

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications



**Made In The
USA**

This space for Architect/Engineer Approval