

Residential Electric Lowboy Water Heater

RESIDENTIAL ELECTRIC LOWBOY

ENHANCED HEATING ELEMENTS

- Dual 4500 watt elements for fast recovery and reliable operation.
- Incoloy stainless steel lower element lasts longer than a standard copper element.

HIGH ENERGY FACTORS

 Eco-friendly non-CFC foam insulation, heat traps and other features combine to yield a higher Energy Factor that maximizes savings on operating costs.

COREGARD™ ANODE ROD

 Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

3/4" WATER CONNECTIONS

Top inlet and top outlet

BLUE DIAMOND® GLASS COATING

 Provides superior corrosion resistance compared to industry standard glass lining.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

CODE COMPLIANCE

- Meets UBC, CEC and ICC National Codes.
- Complies with the current edition of ASHRAE/IES 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended.

APPROVED FOR MANUFACTURED HOUSING

 All residential electric water heaters are compliant with HUD Standards for mobile homes/ manufactured housing.

CERTIFIED TO UL 174 FOR HOUSEHOLD ELECTRIC WATER HEATERS

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure.
- Listed according to UL 174 standards governing storage tanktype electric water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

 For complete information, consult written warranty or go to americanwaterheater.com.









Residential Electric Lowboy Water Heater


	Model Number	Gallon Capacity	First Hour Rating Gallon	Energy Factor	Recovery @ 90°F Rise Gallon Per Hour	Element Wattage 240V		Dimensions in Inches			Approx. Shipping
						Standard	Maximum	Α	В	ပ	Weight (lbs)
E6	N-50LB*+	48	57	0.95	21	4500	6000	34	25	26-1/2	172


Male 3/4" water connections; top inlet and top outlet.

*Models ship with supplied insulation blanket.

+ Top T&P option must be specified at time of order and is not available on 10-year warranty models.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



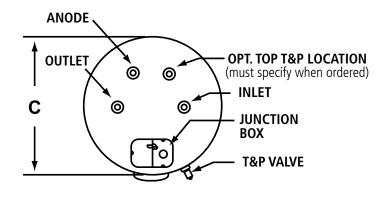

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.

[†]For 10-year tank and 6-year parts warranty, change "6" to "10" in the model number (example: E6N-50LB becomes E10N-50LB).